




# **LPWL-1 MANUAL**

## **TACTICAL LED FLASHLIGHT**




**LASPUR**

# CATALOG

FEATURES 03

INSTALLATION 04

WARNINGS 05



**LPWL-1**

# FEATURES

Based on the purposes of providing a better protection for families, and giving a big shock to the invaders, *LASPUR* LPWL-1 came out.

## Feature NO.1



### Super light, subcompact design

LPWL-1 frame is made of 6061-T6 which will not increase burden on users. ( Less weight, less influence to the habit of shooting.)

## Feature NO.2


### Hidden

All body higher HARD ANODIZING surface treatment.

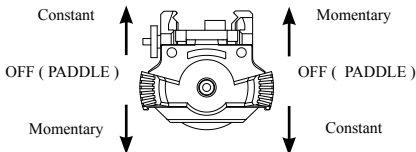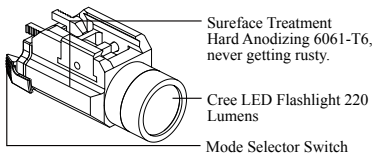

# INSTALLATION

LPWL-1 fits for picatinny rail and weaver rail.

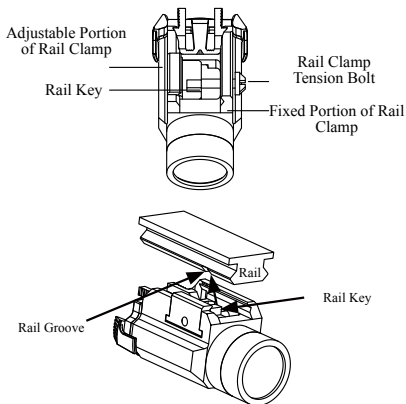

1. The LPWL-1 is designed to be quickly attached or detached from the side of the weapon or accessory rail.
2. Loosen the rail clamp tension bolt.
3. Angle the LPWL-1, placing the fixed portion of the rail clamp against the accessory rail and align the rail key with the appropriate cross groove in the accessory rail.
4. Depress the tension bolt to open the rail clamp, rotate the LPWL-1 into place and release the pressure on the tension bolt to "snap" the light in place.
5. Check for fit and tighten tension bolt until the LPWL-1 is securely attached to the firearm. A coin should be used to obtain sufficient tightness.

# WARNINGS

\*Before handling any firearm with the *LASPUR*, read and understand the entire contents of your firearm manual and the *LASPUR* manual, especially the safety precautions and procedures for safe firearms handling.


\*Always check to see if the chamber of the weapon is empty or "clear" before attempting to mount or dismount the *LASPUR*. Follow the "clearing" procedures as set forth in the manual for your firearm.

\*Be sure of your target and background before firing. When you squeeze the trigger, you must expect the pistol to fire and you must take full responsibility for firing it.

\*NEVER put your hand in front of the muzzle of a firearm. ALWAYS keep your finger away from the trigger until you are ready to fire. ALWAYS make sure the weapon is clear and on safe before making windage/elevation adjustments.

Battery: 16340/CR123A \* 2PCS

The battery upside down is not allowed, if so will cause fire. Batteries should out of *LASPUR* if long time no use. Low battery should be changed.



## INFORMATION

---

Manufacturer: 6711 156th  
AVE SE BELLEVUE WA 98006

Tel: + 1 - 206 - 557 - 0521

E-mail: [lijie6600@gmail.com](mailto:lijie6600@gmail.com)

Web Site: [www.laspur.com](http://www.laspur.com)